




...the passion for moving

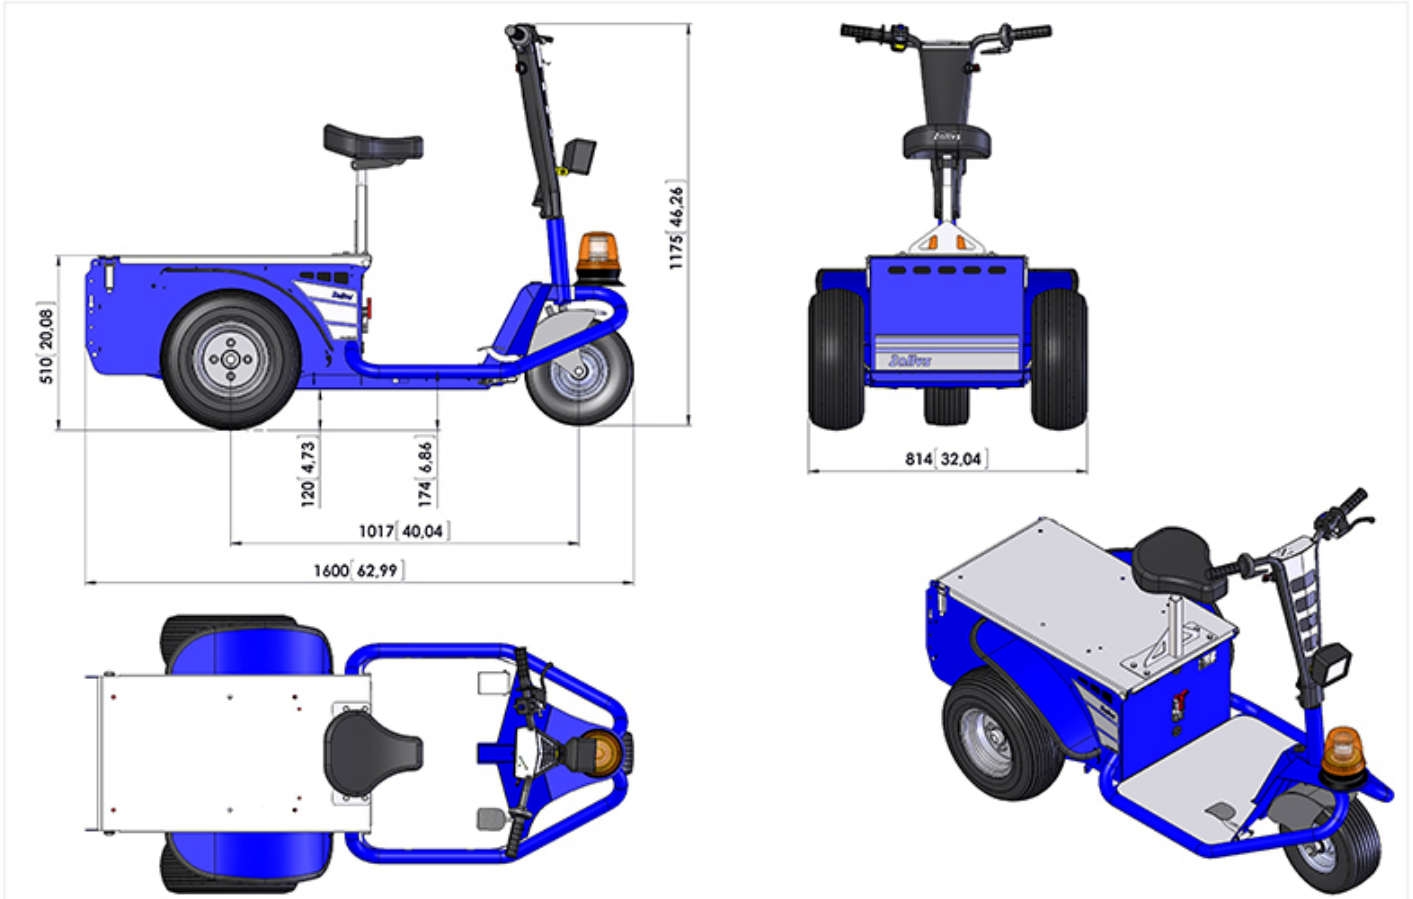

Zallys

TABLE:

JACK

Unit: mm / [inch]

1:10

Characteristics		Tolerance	M.U.	.
1.01	Model number			Z121.702-11
1.02	Model name			JACK
1.03	Manufacturer			ZALLY
1.04	Operator			Driver seated
1.05	Power unit			Electric
1.06	UL			
1.07	CE			

Frame characteristics		Tolerance	M.U.	.
1.80	Frame made of			Steel
1.82	Anti-Corrosion Treatment (on customer demand only)			Cataphoresis
1.83	Frame treatment			Polyester powder coating

Safety data		Tolerance	M.U.	.
2.01	Dead man safety system			Dead man safety pedal
2.06	Power supply disconnection device			Detachable power connector
2.07	Lighting device			Halogen light
2.08	Light signaling device			Rotating beacon
2.09	Audible reverse beeper			beeper
2.10	Acoustic signaling			Electric horn
2.11	Drive controls			Maintained action switch

Performances		Tolerance	M.U.	.
3.01	Max. forward speed	± 5 %	km/h	16
3.02	Max. backward speed	± 5 %	km/h	8
3.06	Max.load capacity on flat ground		kg	150
3.15	Max.slope with load *		%	10
3.18	N° Operatori			1
3.38	* Load capacity is subject to kind of slope , kind of floor and operating time			

Drive controls		Tolerance	M.U.	.
4.01	Type of control			Handle Bars
4.02	Type of start control			handlebar gas-grip

Standard batteries		Tolerance	M.U.	.
5.01	Batteries			2
5.02	Batteries type			Traction lead acid batteries
5.03	Battery voltage		V	12
5.04	Nominal Capacity 5 h		Ah	72
5.05	Nominal Capacity 20 h		Ah	96
5.06	Weight of each battery		kg	25

Optional battery specifications		Tolerance	M.U.	.
5.11	Batteries pcs			2

5.12	Batteries type			Traction AGM batteries
5.13	Battery voltage		V	12
5.14	Nominal Capacity k5		Ah	50
5.15	Nominal Capacity k20		Ah	70
5.16	Weight of each battery		kg	22

Optional battery specifications		Tolerance	M.U.	.
5.21	Batteries			4
5.22	Batteries type			Traction lead acid batteries
5.23	Battery voltage		V	6
5.24	Nominal Capacity k5		Ah	180
5.25	Nominal Capacity k20		Ah	240
5.26	Weight of each battery		kg	29
5.28	Weight of 180/240A battery pack		kg	138

Optional battery specifications		Tolerance	M.U.	.
5.31	Batteries			4
5.32	Batteries type			Traction GELbatteries
5.33	Battery voltage		V	12
5.34	Nominal Capacity k5		Ah	180
5.35	Nominal Capacity k20		Ah	240
5.36	Weight of each battery		kg	33
5.37	Weight of 180/240A battery pack		kg	152

Available chargers		Tolerance	M.U.	.
6.40	Standard voltage		V	220/240
6.41	Multitension		V	110/240
6.42	Plug			In use in the country of destination

Technical data of standard charger		Tolerance	M.U.	.
6.01	Battery charger			External - high frequency
6.02.1	Input voltage max		V	230
6.03	Input Frequency		Hz	50-60

Optional charger specifications		Tolerance	M.U.	.
6.14	Charger suitable for AGM batteries of		A	50/70
6.19	**for all other details please refer to standard charger specifications			

Optional charger specifications		Tolerance	M.U.	.
6.20	Charger suitable for lead acid batteries of		A	180/240
6.25	**for all other details please refer to standard charger specifications			

Optional charger specifications		Tolerance	M.U.	.
6.26	Charger suitable for GEL batteries of		A	180/240
6.31	**for all other details please refer to standard charger specifications			

Drive motor		Tolerance	M.U.	.
7.03	Engine			Electric
7.04	Electricity			Direct current
7.05	Engine voltage		V	24

Technical data		Tolerance	M.U.	.
8.01	Transmission system			Mechanical
8.02	Transmission lubrication			In oil bath
8.05	Traction			Rear-wheel drive
8.06	Service brake			Electronic
8.07	Service and emergency brake			Mechanical
8.08	Parking brake			Electro-Mechanical
8.12	Type of seat			Padded seat

Weight		Tolerance	M.U.	.
9.01	Weight without batteries		kg	127
9.08	Weight incl. 72/96A lead acid batteries		kg	177
9.09	Weight incl. 50/70A AGM batteries		kg	171
9.10	Weight incl. 180/240A lead acid batteries		kg	265
9.11	Weight incl. 180/240A GEL batteries		kg	279

Dimensions		Tolerance	M.U.	.
10.01	Length		mm	1600
10.02	Width		mm	814
10.03	Height of start control		mm	1175
10.06	Height of seat / saddle		mm	860
10.08	Loading platform height		mm	510
10.14	Wheelbase		mm	1017
10.15	Turning circle		mm	2300
10.50	**For further details please click on dimensions			

Standard wheels		Tolerance	M.U.	.
11.01	Drive wheels			2
11.02	Steering wheels			1
11.05	Tyres			Pneumatic
11.06	Type of tyres			Grooved tyres
11.13	Drive tyres size			16-6.50-8"
11.15	Steering wheel size			13-5.00-6"
11.25	Inflation pressure		bar	2

Optional wheels		Tolerance	M.U.	.
11.42	Tyres			Super-elastic non-marking wheel
11.43	Kind of tyres			Turf tyres
11.44	Drive tyres size			4.00-8"
11.46	Steering wheel size			4.00-4"