



AEUP[®]

Absolute E-Z Up



And work just became fun again...

presents the IAWP-7.3

This all-new platform from AEUP uses proven technology and yet is MORE COMPACT and EVEN LIGHTER than currently available platforms. It also boasts the LOWEST COST OF OWNERSHIP.


And better still, the IAWP-7.3 retains the strength, reliability and versatility our customers have come to expect.

As always, safety is our number one priority, and this unit will eliminate the need for scaffold, scissor lifts, or ladders. Its unique design promotes usage in very confined areas.


At a glance:

- Self-propelled - It drives at a full working height of 14 ft! Class leader in its sector
- Lightweight – the lowest rolling tire floor load and weighs only 965 lbs. Ideal for use on raised floors.
- Compact – Only 43”L x 30”W x 59”H
- Green – environmentally friendly from manufacturing to utilization
- All this on a small compact base, that is durable, portable and boasts the most exciting warranty in the industry.



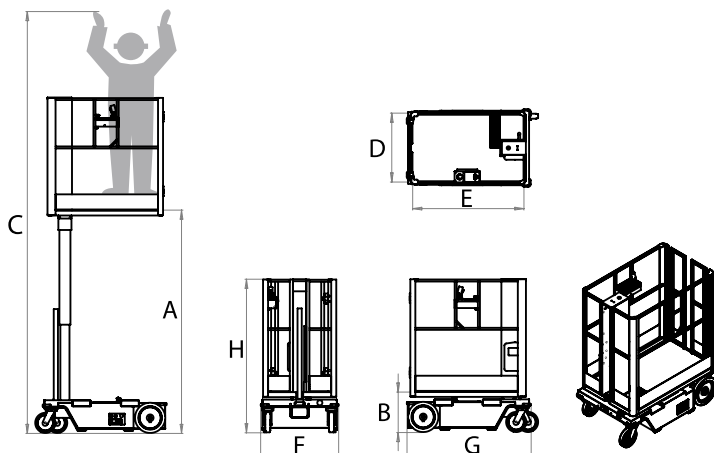

ZERO
Inside Turning Radius
and 39 inches
Outside Turning Radius



The best warranty in the industry:

- 10** years on the mast and cylinder
- 5** years on all components
- 1** year on batteries, not prorated

- Swing entry gate with stainless steel hinges and integral toeboard for safe and easy access to the platform
- Integral fork pockets make light work of transporting the IAWP-7.3
- Easy to use joystick operates fully proportional lift and drive for precise and easy maneuverability.
- Low platform entry height for easier access
- Direct drive system provides a duty cycle of 270 complete lifts (up & down) or the ability to drive over 12 miles on a single charge.
- Simple control system for ease of use
- Minimal componentry makes the IAWP-7.3 a perfect addition to your fleet
- Reinforced all-steel powder-coated chassis and platform means the IAWP-7.3 will withstand the harshest of work environments
- Proven Easy-Load system, provides increased ground clearance for use on steep ramps /uneven work sites.

Technical Data	Metric		US
Platform Height Elevated	2210 mm	A	7ft 3in
Platform Height Lowered	398 mm	B	1ft 3in
Max Working Height	4210 mm	C	14ft
Platform Width	682 mm	D	2 ft 2 in
Platform Length	1101 mm	E	3 ft 7 in
Chassis Width	772 mm	F	2 ft 6 in
Chassis Length	1229 mm	G	4 ft
Stowed Height	1520 mm	H	4 ft 11 in
Platform Unrestricted Capacity	1-person + tools 180kg 397lbs		1-person + tools 180kg 397lbs
Total Transport Weight	438 kg		965 lbs
Gradeability	35%		35%
Inside Turning Radius	Zero		Zero
Batteries	2 - 12V 85 Ah		2 - 12V 85 Ah
Power source	110/220v		110/220v
Max drive speed (lowered)	3km/h		1,9 mph
Elevated Drive Speed	0.6km/h		0.35mph
STANDARD COMPLIANT	Ansi A92.6, CE Compliant, AS1418.10 (int)		



Compact & Powerful



Integral fork pockets



©February 2011 - Absolute E-Z Up®, LLC
 Specifications subject to change without notice.
 Photos and drawings are for illustrative purposes.

distributed by:



AEUP Absolute E-Z Up llc
 843-388-2556---office
 www.absolute-zup.com

Charleston, SC 29492
 843-388-2558---fax
 e-mail: salesdept@absolute-zup.com