



# Presents the **CAWP-9.6** Construction Aerial Work Platform

# ONE SOLUTION, ENDLESS POSSIBILITIES!

**Safety** is our number one priority. The latest in technology promotes safety and is the most cost effective unit in today's market.

The **CAWP-9.6** <sup>™</sup> allows operators to work independently and increase productivity while eliminating the need for scaffold, scissor lifts and push-around units.

- No ladders, no outriggers, no hassles.
- One man (though rated for two) can easily do a job safely, quickly and efficiently.
- It has the lowest rolling tire floor load and unit weight in the industry just 1,170 lbs.
- Unit features dual platform extensions with an unrestricted platform capacity.
- Its unique design promotes usage in very confined areas. Small elevators, narrow hallways, closets, aisle ways, mezzanines and congested office space are just a few of its many applications.
- Portability is another key. The unit is light, compact, and easily loaded into a van, truck or pickup. One man can operate and maneuver it easily or it can be loaded with its top mounted forklift.
- The **AEUP CAWP-9.6**<sup>™</sup> is environmentally friendly.

All this on a small, compact steel base made to stand up to the toughest and harshest construction sites. Its durability and portability are accompanied by the most exciting warranty in the industry.

# Work just became fun again...


















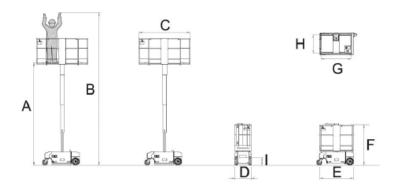



#### Ulta-compact design.

Unique combination of low floor load rating, spacious basket, proportional drive / lift speed with gradeability. **ZERO** Inside Turning Radius

| MEASUREMENTS                                  |                               | US                  |
|---|-------------------------------|---------------------|
| Α   | Platform Height               | 9'6"                |
| В   | Working Height                | 16'                 |
|   | Platform Length               | 44"                 |
| С   | Platform Length w/ext'd decks | 67.3"               |
| D   | Unit Width                    | 28.8"               |
| Е   | Base Length                   | 47"                 |
| F   | Stowed Height                 | 68.7"               |
| G   | Platform Length               | 44"                 |
| Н   | Platform Width                | 26.4"               |
| 1   | Entry Step                    | 15.6"               |
| Ground Clearance                              |                               | 3.4"                |
| Capacity w/Decks Ext'd                        |                               | 397 lbs.            |
| Tires   |                               | Solid Non-marking   |
| Front Wheel: Diameter / Width                 |                               | 8" / 2.8"           |
| Rear Wheel: Diameter / Width                  |                               | 12" x 3.6"          |
| Rated Number of Occupants                     |                               | 2                   |
| PERFORMANCE                                   |                               |                     |
| Drive Speed- Stowed                           |                               | 1.9 mph             |
| Drive Speed- Elevated                         |                               | .35 mph             |
| Raise/Lower Speed                             |                               | 16 / 21 sec.        |
| Inside Turning Radius                         |                               | Zero                |
| Outside Turning Radius                        |                               | 49.3"               |
| Gradeability                                  |                               | 35%                 |
| Controls                                      |                               | 1-Hand Proportional |
| POWER   |                               |                     |
| Power Source                                  |                               | 110/220V, ca24Vcc   |
| Batteries                                     |                               | (2)12V 85Ah @20h    |
| COMPLIANCE: ANSI A92.6, CE, AS1418.10 (Int'I) |                               |                     |

## Manufacturer 5-2-1 Platinum Warranty The BEST in the industry!



## Model Highlights: Lightweight, Rugged, Versatile

- Maintenance-free Hydraulic Mast Design, (no chains or cables) Eco-Friendly
- **Outstanding Ground Clearance**
- Active Pothole Protection
- Dual platform extension decks
- Battery Duty Cycle: 250 lift cycles or 7.4 mi.
- Fully Proportional Lift & Drive
- Built-in tilt sensor, flashing travel light / alarm
- Fast & Efficient Serviceability
- Easy transport from job-site to job-site

### The Ideal Solution for A Variety Of Applications

- Mechanical, Electrical & Plumbing Contractors: Lighting, Heating/HVAC, Sprinkler, etc..
- Ceiling, Drywall Insulation Contractors: Drop Ceiling, Acoustic, Metal and Texture Ceiling; Plasterboard Partitions, etc.
- > IT Services: Structured Cabling; Analog, Voice-VOIP Data Cabling; Antenna Systems; Security camera /monitors, etc.
- Plumbing Contractors, Panelized Slab Form-work, Shuttering / striking, reworking / dismantling, etc.
- Building Maintenance: Accessing Utilities, Changing lights / signs, cleaning and sanitizing, etc.
- Renovation Contractors: Painting Contracting, Facilities Management



Distributed By:

One-of-a kind **CAWP-Rocker Accessory** available for overhead installations. Call for more details.





Telephone: 843.388.2556

Fax: 843.388.2558 Email: salesdept@absolutee-zup.com www.absolutee-zup.com JULY 2021. In an ongoing effort to improve product, specifications are subject to change without notice. Photos and drawings are for illustrative purposes only.